

# T20 - LED Work Light

## TECHNICAL DETAILS

Model No.  
T20 - 60W  
T20 - 100W  
T20 - 150W




## PRODUCT SPECIFICATION

The T20 Work Light is a versatile workplace illumination unit with multiple functions:

- \* Handle and pads for use as a hand-held portable unit. Handle features a mounting hole to allow vertical mounting options.
- \* Durable metal mesh protects against impacts, and allows the light to be used confidently in industrial and construction environments.
- \* Universal adaptors can be used to chain power from one light to one or more other units.
- \* 360° degree illumination provides thorough lighting for large areas.
- \* High-efficiency LEDs draw little power, require no maintenance, and have a very long service life.

## INSTALLATION

<p><b>Step 1:</b> Use the base hook to hang on a secure fixed wall or object.</p>	<p><b>Step 2:</b> Ensure the fixed wall or object can support 30kg</p>
<p>If attaching several lights in a string:</p> <p><b>Step 3:</b> Connect the desired number of lights together. Rotate the anti-pull buckle into place to prevent accidental disconnection.</p> <p><b>Step 4:</b> Close the connector cap for the final light in the chain.</p>	

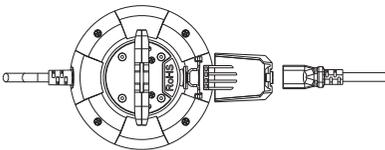

### PLEASE NOTE

Maximum 5A in string configuration

The T20 Work Light will automatically deactivate if too many units are connected together. When this occurs, only the first light in the chain will illuminate. When the excess lights are removed, the chain will turn back on. This can take up to 10 seconds.

Watts	Input	lm/W	Dimensions	Maximum Connections	Operating Temp
60W	120V AC	120 lm/W	130 x 130 x 233mm	10 Light String	-30°C to +40°C
100W	120V AC	120 lm/W	130 x 130 x 278mm	6 Light String	-30°C to +40°C
150W	120V AC	120 lm/W	130 x 130 x 308mm	4 Light String	-30°C to +40°C

# T20 - LED Work Light

## WARNING NOTICES

- 1) Read this manual carefully before use, and ensure that the lights are used in accordance with the given guidelines.
- 2) To reduce the risk of electric shocks and fire, do not exceed the recommended maximum string size for your lights. This is 10pcs for 60W, 6pcs for 100W, and 4pcs for 150W.
- 3) These work lights are suitable for use in both dry and damp locations.
- 4) Work lights should be disconnected from power when wet in order to avoid electric shocks.
- 5) This unit is not intended to be used as illumination for emergency exits.
- 6) Do not install this unit in a hot or sealed environment, or allow them to be exposed to corrosive gases, as this can affect the service life.
- 7) Do not place any combustible or flammable materials on the lamp surface.
- 8) This light should be installed, tested and maintained by professionals using appropriate equipment.
- 9) Check the contents of the package upon receipt, and advise your dealer of any damage.

## MOUNTING INSTRUCTIONS

### REMOVING THE HANDLE




1-2. Remove the screws


3-4. Bend the handle 90 degrees towards the screws

5. Lift and remove

### CONNECTING EYEBOLT

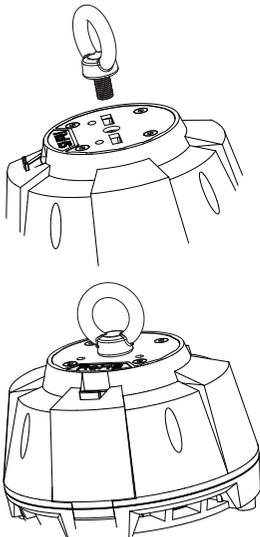

### TRIPOD INSTALLATION

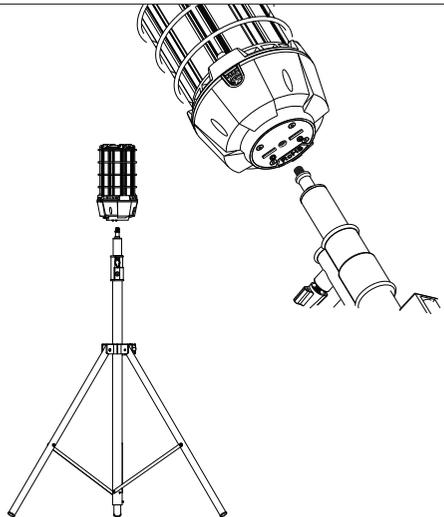

## WARRANTY INFORMATION

This product is provided with a 5 year warranty. Free repair or replacement will be offered during this period.

The warranty is not valid if :

- \* Damage is caused by improper operation or installation of the unit.
- \* The unit has been dismantled or repaired without authorisation.
- \* The user cannot supply a valid invoice or proof of purchase.

For assistance after the warranty period expires, please contact your supplier.

WHI Safeguard Limited  
Meryll House, 57 Worcester Rd,  
Bromsgrove, B61 7DN.  
T. 44 (0) 1753 325 101  
E. info@whisafeguard.com  
MADE IN CHINA

